



Uni-Tap®



Available Materials

- High strength nylon

Features/Advantages


- Light to medium loads under dead, variable or vibratory conditions, in solid or hollow environments
- Impervious to moisture
- Quick and easy to install

Concerns

- Drill recommended hole diameter

Installation

- 1 Drill hole slightly deeper than fastener length. Clean hole of debris.
- 2 Tap "Uni-Tap" into place through material to be fastened.

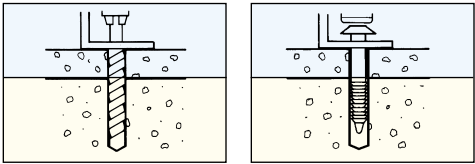

Order Detail

Order Code	Size	Hole Diameter				Ultimate Tensile in Shear Load in Lbs.				
		Masonry	Wood/Metal	Head Diameter	Grip Range	Tension Hollow Wall	Shear Hollow Material	Tension Cement Block	Head Style	Box Quantity
6460	9/32 x 1	1/4"	9/32"	5/8"	3/16-1/2"	130	250	150	TRUSS	100
6660	9/32 x 1 5/8	1/4"	9/32"	5/8"	3/8-1 1/8"	130	253	158	TRUSS	100
6760	9/32 x 2 1/8	1/4"	9/32"	5/8"	7/8-1 5/8"	130	274	154	TRUSS	100
6860	9/32 x 2 5/8	1/4"	9/32"	5/8"	1 3/8-2 1/8"	130	238	163	TRUSS	100
6960	9/32 x 3 1/8	1/4"	9/32"	5/8"	1 7/8-2 5/8"	130	228	150	TRUSS	100